

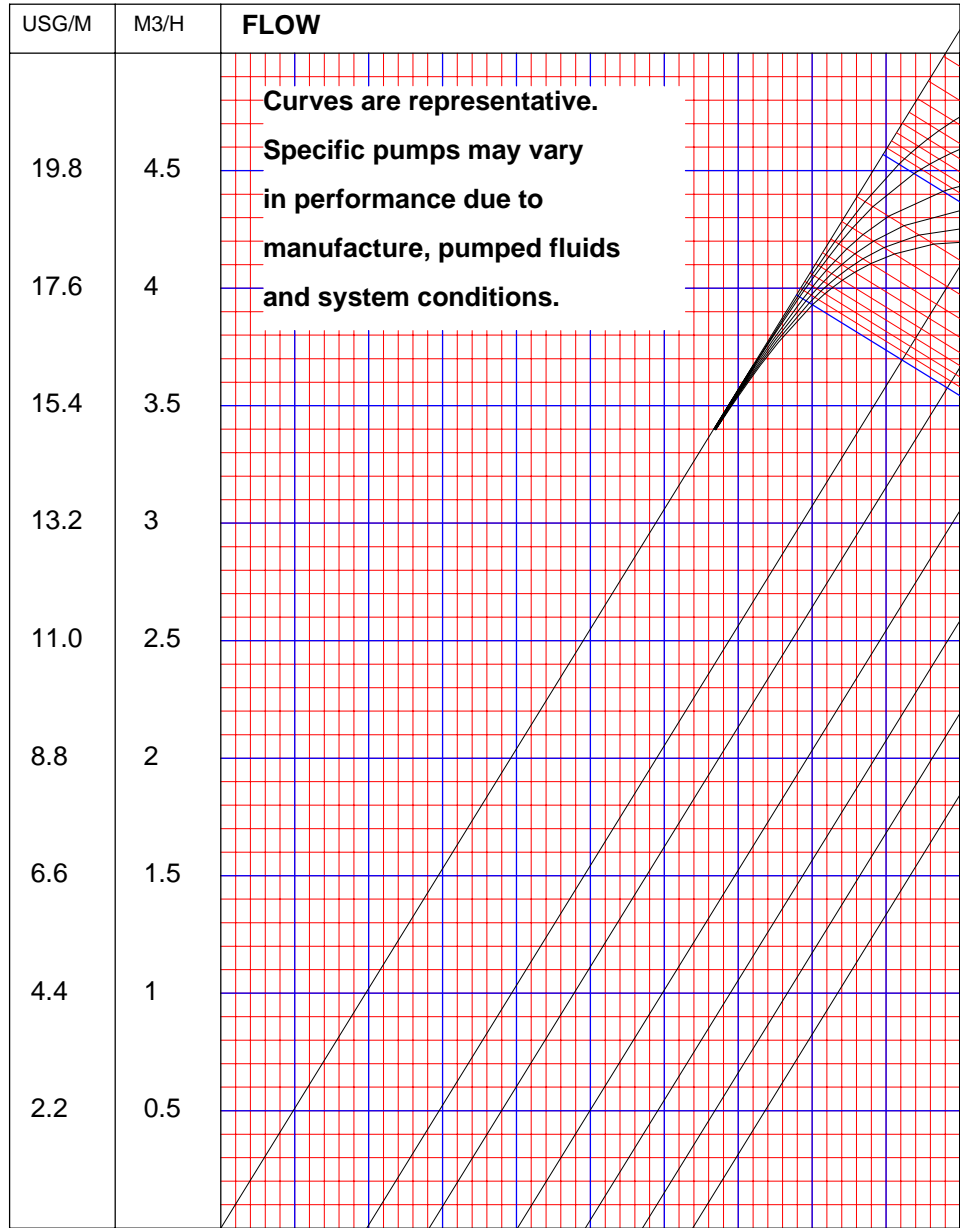


TYPICAL PERFORMANCE CURVE SRU1WLD (SRU1/008) WITH HYCLEAN SEAL

**ROTORS - ST.STL
TRILOBE
5 BAR (72.5 PSI)
70 °C (158 °F)**

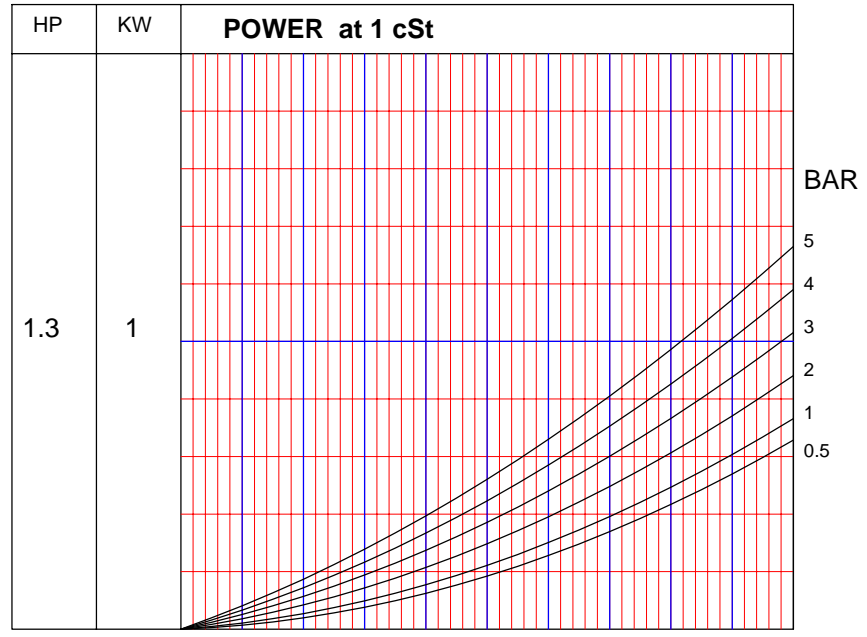

Curves are representative.
Specific pumps may vary
in performance due to
manufacture, pumped fluids
and system conditions.

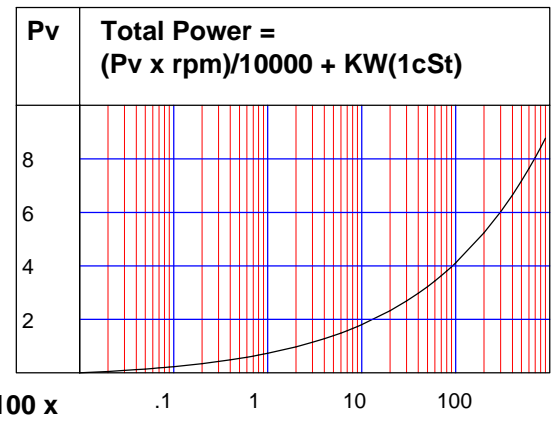

SPEED rpm 100 200 300 400 500 600 700 800 900 1000

SPEED rpm 100 200 300 400 500 600 700 800 900 1000

22.2 mm PORT BORE

527 259 169 123 94 74 59 47 37 28 X 100

MAX VISCOSITY (cSt) (at 0 BAR)

MAX SPEED = 1000 rpm