

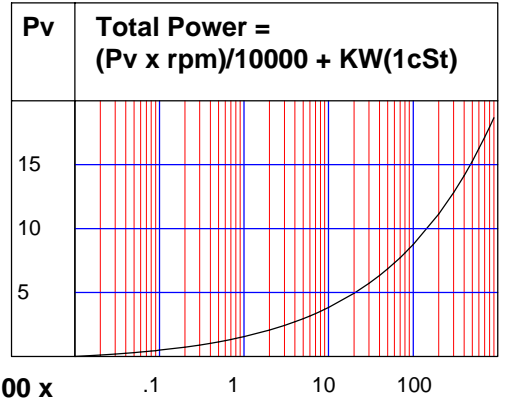
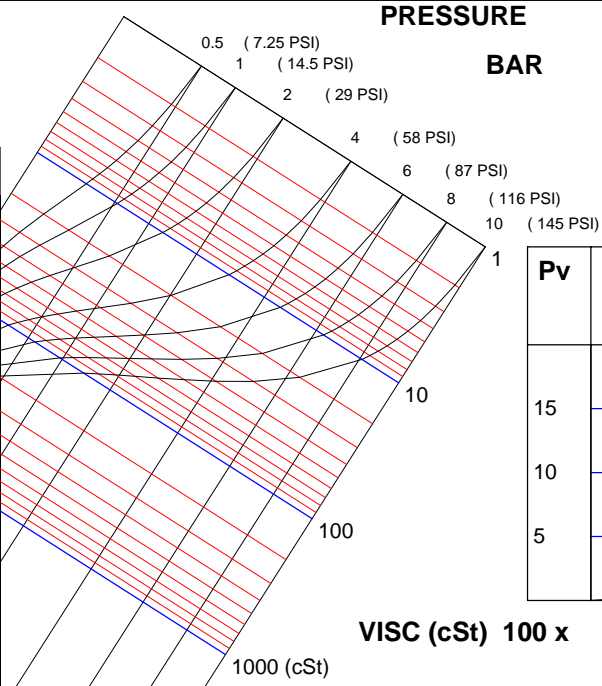


# TYPICAL PERFORMANCE CURVE SRU2WLD (SRU2/018) WITH HYCLEAN SEAL

**ROTORS - ST.STL  
TRILOBE  
10 BAR ( 145 PSI)  
70 °C ( 158 °F)**

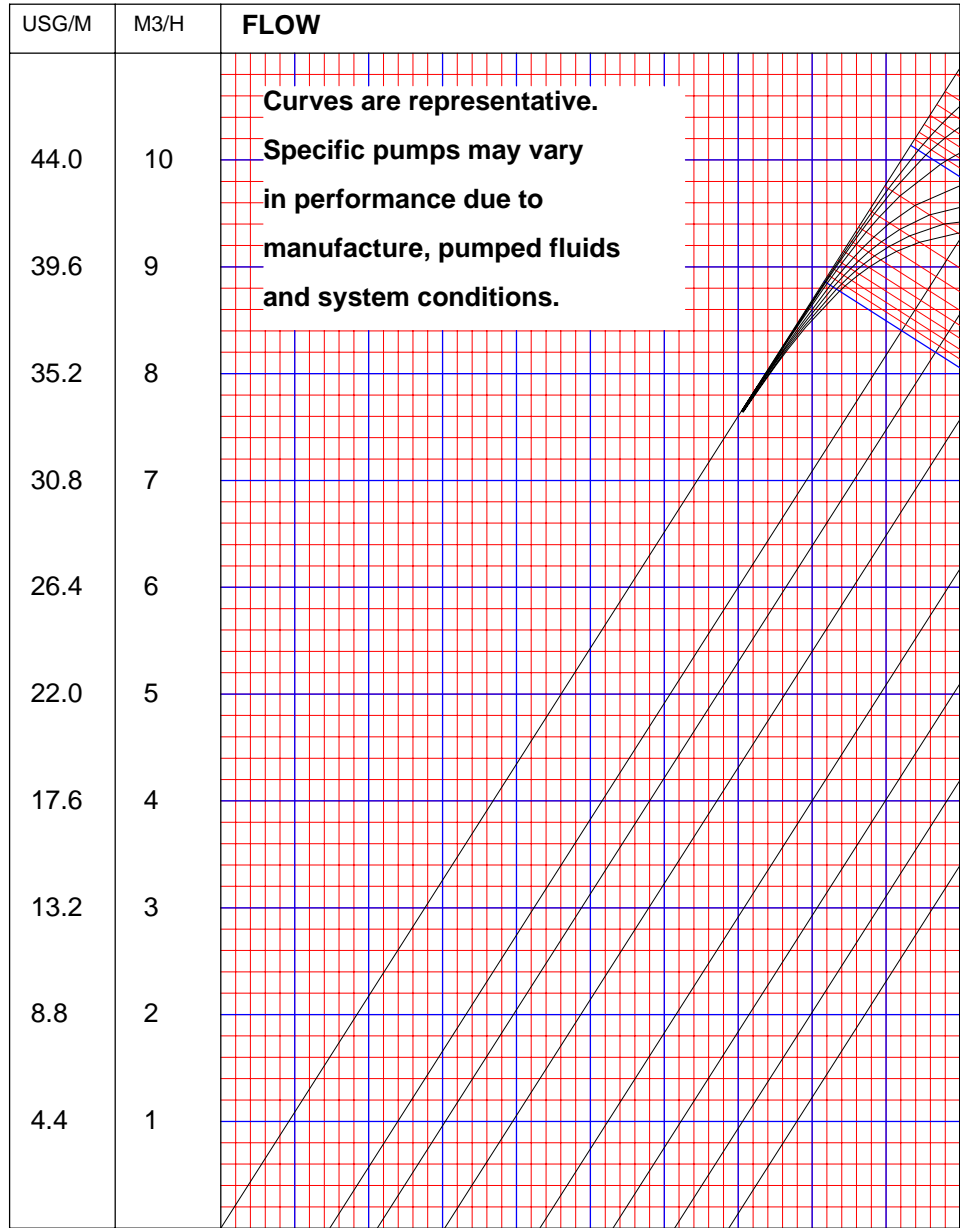

**SPEED rpm** 100 200 300 400 500 600 700 800 900 1000

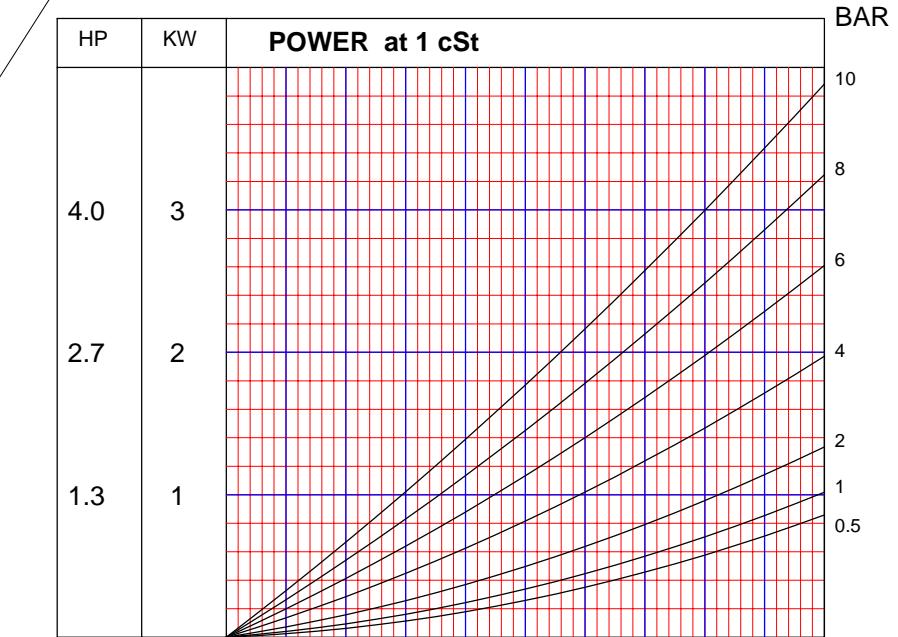

**SPEED rpm** 100 200 300 400 500 600 700 800 900 1000

**34.9 mm**  
**PORT BORE**

1523 755 496 361 278 221 178 145 118 94 X 100

**MAX VISCOSITY (cSt) (at 0 BAR)**

**MAX SPEED  
= 1000 rpm**

Issued by	Philip Stokes
SRU-018-H-10-70-REV-1	nov/00