
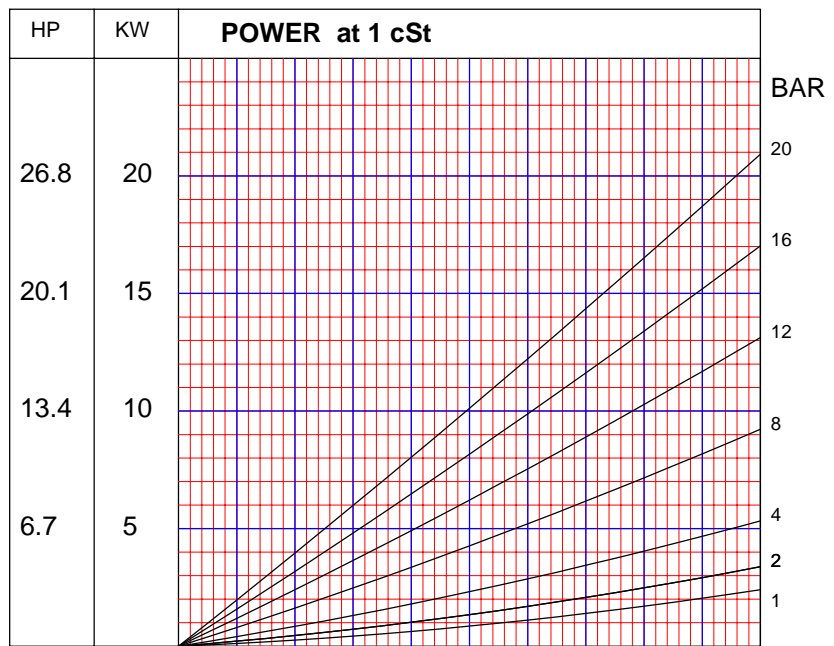
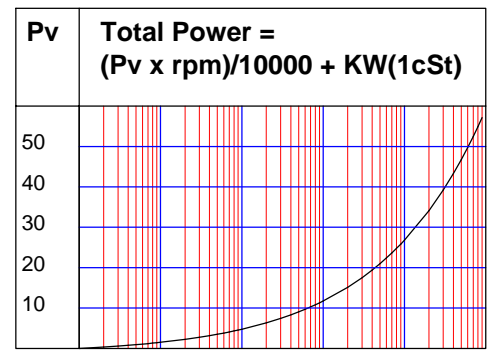
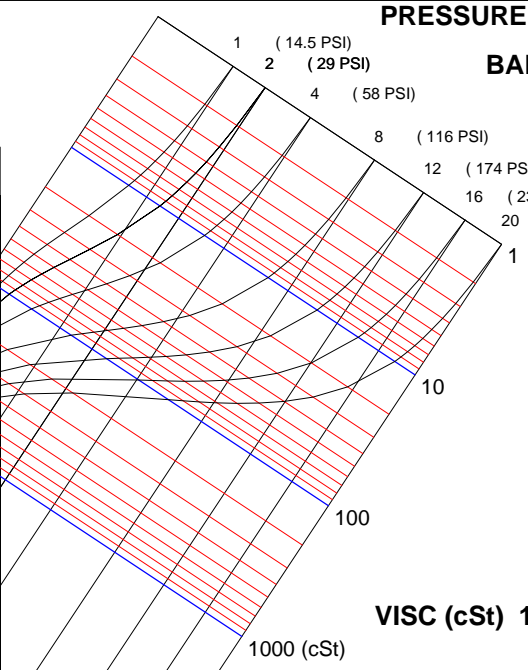


# TYPICAL PERFORMANCE CURVE

## SRU4NLD (SRU4/055) WITH HYCLEAN SEAL

**ROTORS - ST.STL**  
**TRILOBE**  
**20 BAR ( 290 PSI)**  
**70 °C ( 158 °F)**

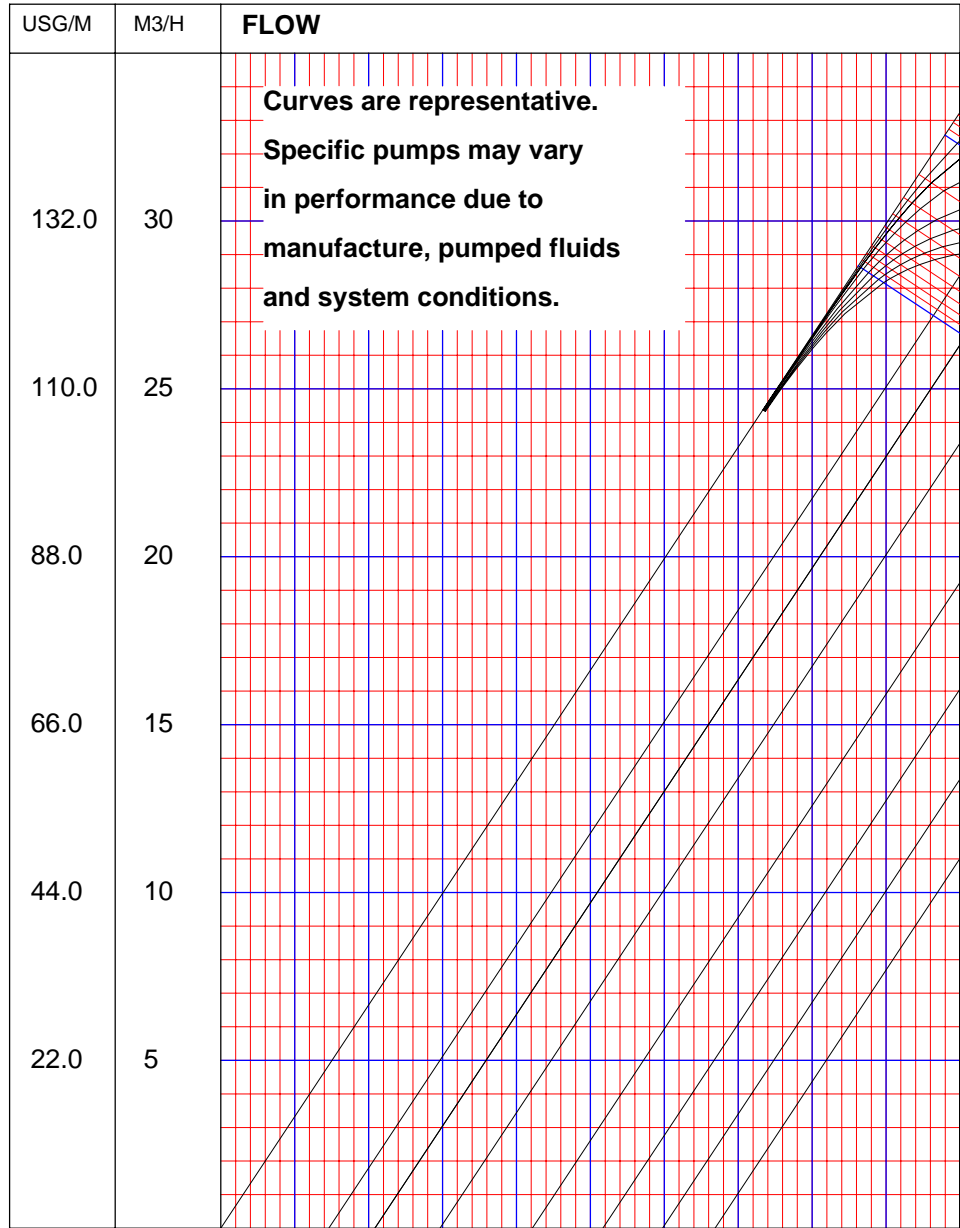

**SPEED rpm** 100 200 300 400 500 600 700 800 900 1000

**SPEED rpm** 100 200 300 400 500 600 700 800 900 1000

**47.6 mm**  
**PORT BORE**

1313 643 410 287 209 153 110 75 45 18 X 100

**MAX VISCOSITY (cSt) (at 0 BAR)**

**MAX SPEED**  
**= 1000 rpm**

Issued by	Philip Stokes
SRU-055-H-20-70-REV-1	nov/00