
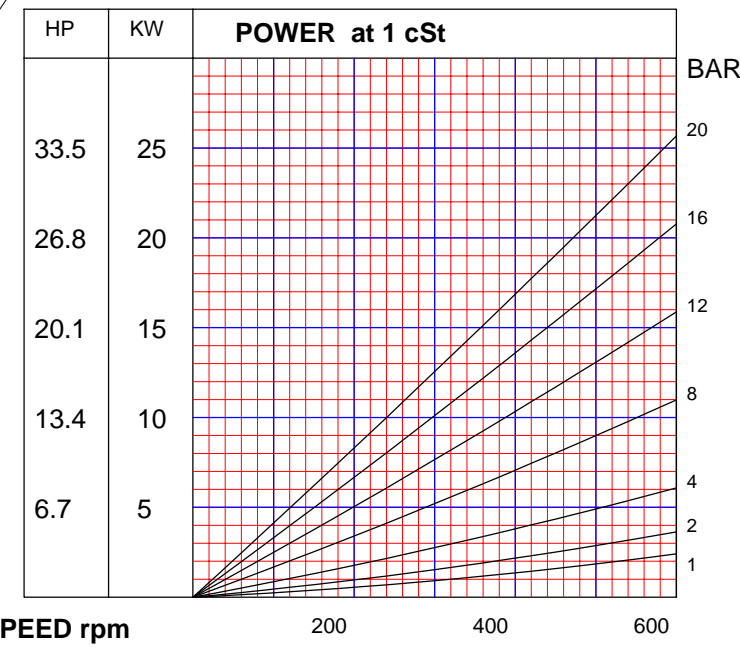
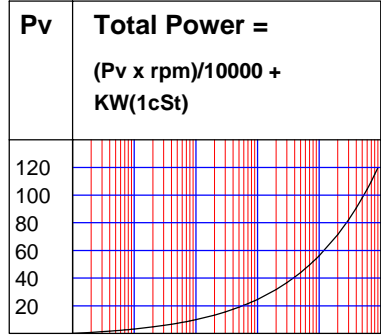
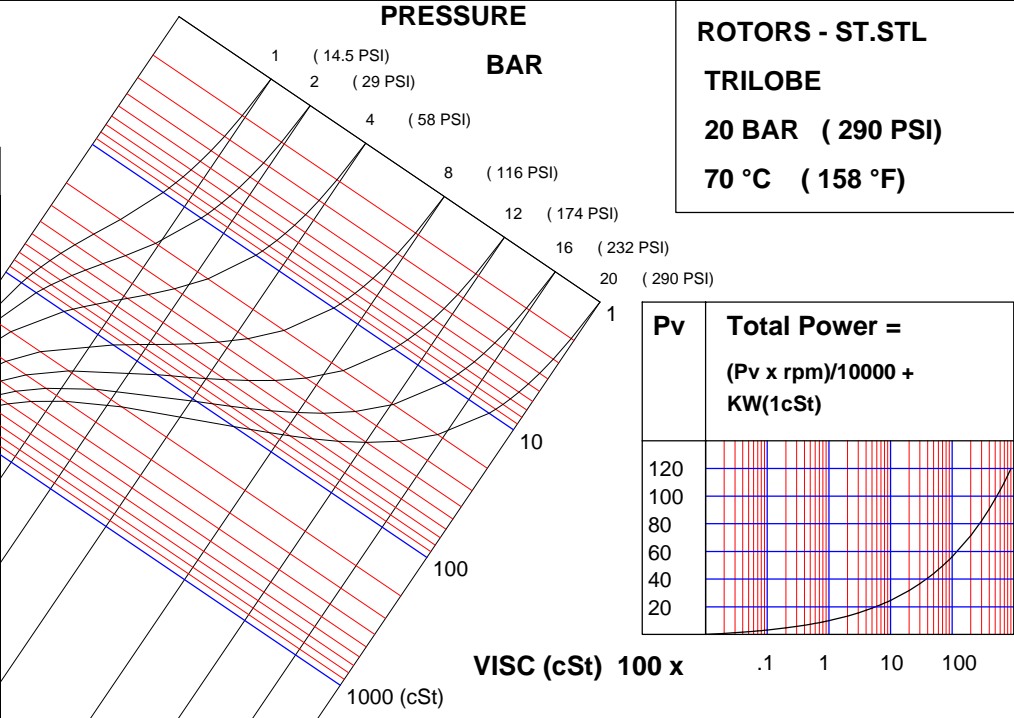


# TYPICAL PERFORMANCE CURVE SRU5NLD (SRU5/116) WITH HYCLEAN SEAL

**ROTORS - ST.STL  
TRILOBE  
20 BAR ( 290 PSI)  
70 °C ( 158 °F)**

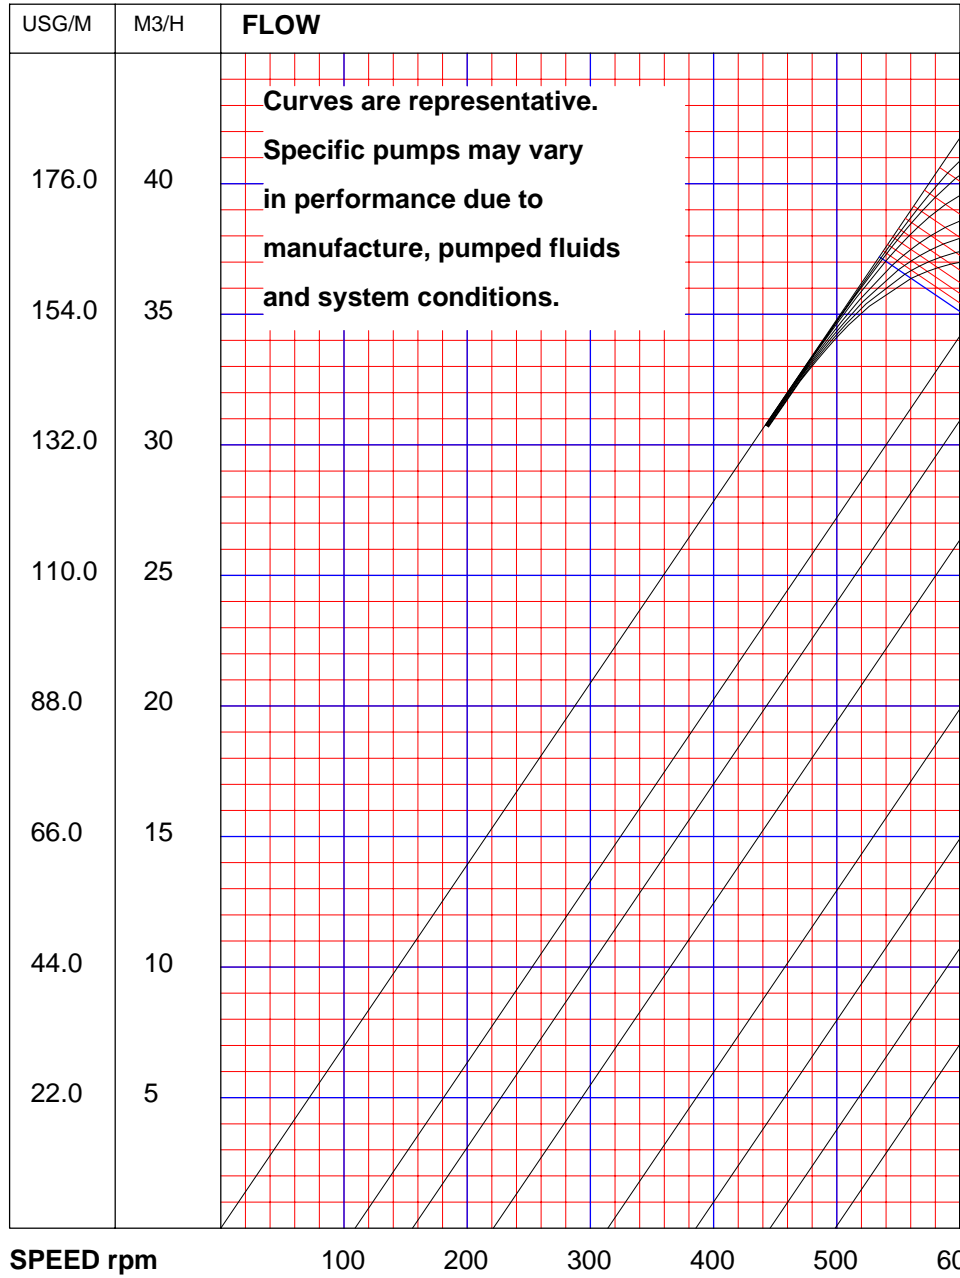

**60.3 mm  
PORT BORE**

1467 708 439 298 204 135 x 100

**MAX VISCOSITY (cSt) (at 0 BAR)**

**MAX SPEED  
= 600 rpm**

Issued by	Philip Stokes
SRU-116-H-20-70-REV-1	nov/00