



In all stainless steel and designed for steam

TS6-MFMC Plate Heat Exchangers - Gasketed

Application

Heating of water or CIP (cleaning in place) solutions by means of steam. General heating and cooling duties.

Working Principles

Channels are formed between the plates and the corner ports are arranged so that the two media flow through alternate channels. The heat is transferred through the plate between the channels, and complete counter-current flow is created for highest possible efficiency. The corrugation of the plates provides the passage between the plates, supports each plate against the adjacent one and enhances the turbulence, resulting in efficient heat transfer.

Standard design

The plate heat exchanger consists of a pack of corrugated metal plates with portholes for the passage of the two fluids between which heat transfer will take place.

The plate pack is assembled between a fixed frame plate and a movable pressure plate and compressed by tightening bolts. The plates are fitted with a gasket which seals the interplate channel and directs the fluids into alternate channels. The number of plates is determined by the flow rate, physical properties of the fluids, pressure drop and temperature program. The plate corrugations promote fluid turbulence and support the plates against differential pressure.

The plate and the pressure plate are suspended from an upper carrying bar and located by a lower guiding bar, both of which are fixed to a support column.

Connections are located in the frame plate or, if either or both fluids make more than a single pass within the unit, in the frame and pressure plate.

Typical capacities

Liquid flow rate

Up to 320 GPM, depending on media, permitted pressure drop and temperature program.

Water heating by steam

600-6,100 kBtu/H

Frame type

FMC

Plate types

TS6M



TS6-MFMC

Standard Materials

Frame plate

Frame and pressure plate in solid stainless steel AISI 316L

Nozzles

Stainless steel AISI 316L

Plates

Stainless steel AISI 316

Gaskets

Nitrile, EPDM or HeatSeal F™

Connections

ANSI 3", 150# studed port
3" Tri-Clamp

Technical Data

Mechanical design pressure (g) / Temperature


FMC 145 psi/350°F

Maximum heat transfer surface

13 m² (140 sq. ft)

Particulars required for quotation

- Flow rates or heat load
- Temperature program
- Physical properties of liquids in question (if not water)
- Desired working pressure
- Maximum permitted pressure drop
- Available steam pressure

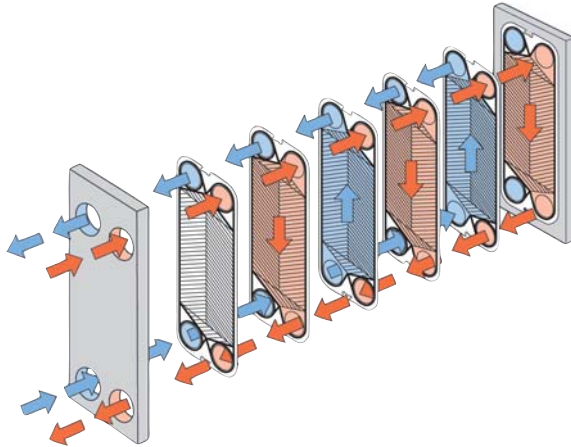


Flow principle of a plate heat exchanger

Optional

- Protection sheet.
- Adjustable legs, low or high.
- Wrench.
- Commissioning kit, gaskets.

Dimensions

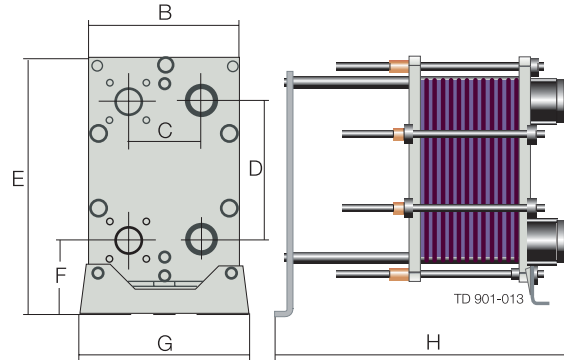

Dimensions	Inch	mm
B	16.0"	410
C	28.0"	203
D	8.2"	380
E	18.5"	705
F	8.0"	209
G	15.0"	470
H	24" - 63"	600-1600

PD66389US 2005-09

The information contained herein is correct at the time of issue, but may be subject to change without prior notice.

How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit www.alfalaval.com to access the information direct.